


FINOMIX® integrated system for bathrooms

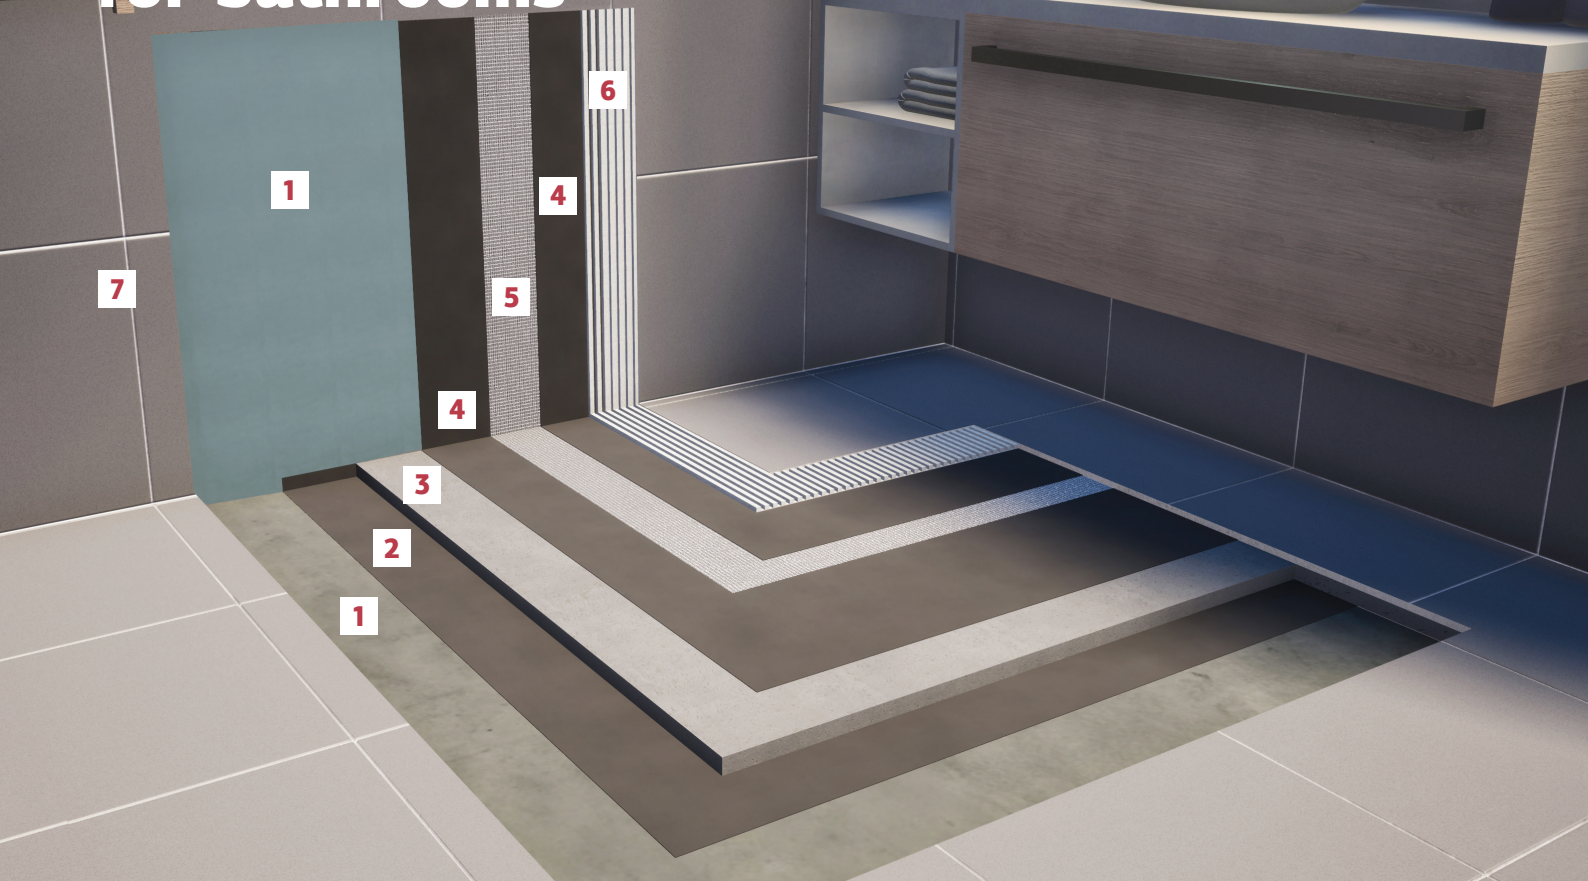

1 SUBSTRATE

2 & 4 WATERPROOFING

hydroseal 6000 1K-flex

Flexible one-component fiber-reinforced waterproofing cementitious slurry
Class A3

hydroseal 6500 aqua-protect

Liquid fast-drying waterproofing membrane for non-exposed surfaces

hydroseal 7000 fibro-flex

Flexible fiber-reinforced 2-component cementitious waterproofing mortar
Class A4

hydroseal 8000 super-elastic

Flexible 2-component brushable sealing slurry
Class A5

3 FLOOR LEVELLING

FS 100 screed

Fiber-reinforced cementitious levelling floor screed
(for layers up to 10 cm thick)

FS 600 fast-screed

Fast-curing low-shrinkage cement mortar for the construction and levelling of floors
(for 2-6 cm thick layers)

5 WATERPROOFING REINFORCEMENT

fiberglass mesh for reinforcing waterproofing layers

Flexible alkali-resistant fiberglass mesh. Weight 60 g/m².

polyester fabric for reinforcing waterproofing layers

Strong polyester fabric. Weight 50 g/m².

6 TILE INSTALLATION

KP 250 special

High performance polymer-modified tile adhesive
Type C2 TE

KP 300 flexy

Elastic polymer-modified tile adhesive - Type C2 TE S1

KP 500 elastic

High performance elastic polymer-modified tile adhesive - Type C2 TE S1

KP 550 GEL ultra S1

High performance GEL-type deformable cementitious adhesive - Type C2 TE S1

7 TILE GROUTING

colour grout 0-4

Acrylic water repellent tile grout - Type CG2

epoxy grout 2-12

2-component epoxy grout - Type RG