


FINOMIX® integrated system for swimming pools

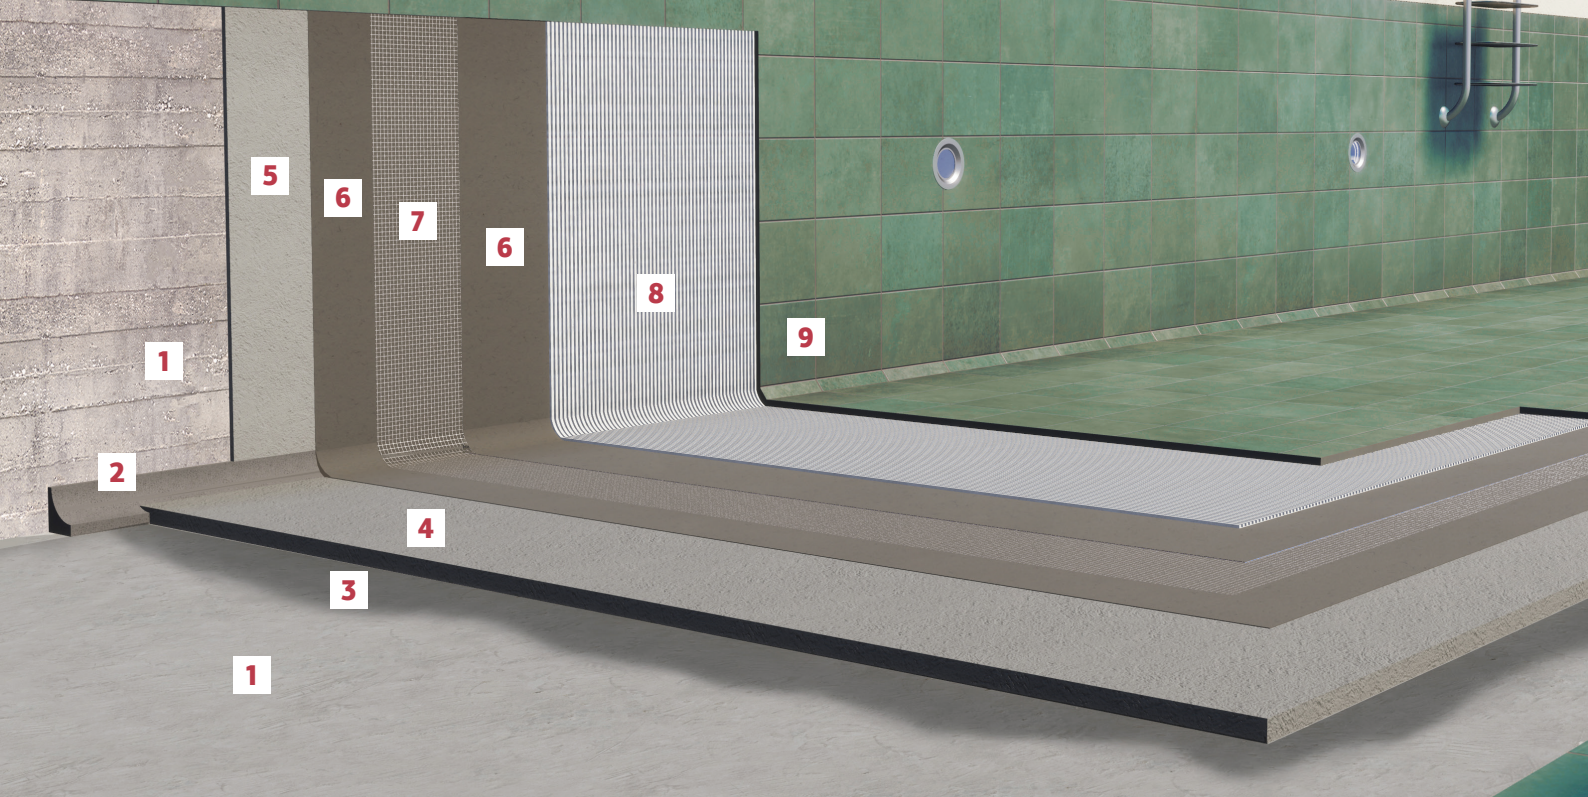

1 SUBSTRATE

2 SHAPING OF COVES AT WALL-FLOOR JOINTS

RP 4000

Fiber-reinforced high strength repairing mortar
(for layers up to 6 cm thick)
Class R4

RP 4200

Fiber-reinforced cementitious mortar
for non-structural repairs
of concrete & masonry
(for layers up to 5 cm thick)
Class R2

3 SURFACE PREPARATION

SBR power·latex

High performance polymer admixture
for cement-mortars

4 FLOOR LEVELLING

FS 600 fast·screed

Fast-curing low-shrinkage cement mortar
for the construction and levelling of floors
(for 2-6 cm thick layers)

5 WALL LEVELLING WITH POOL PLASTER

6 WATERPROOFING

hydroseal 7000 fibro·flex

Flexible fiber-reinforced 2-component cementitious
waterproofing mortar - Class A4

hydroseal 8000 super·elastic

Flexible 2-component brushable sealing slurry - Class A5

7 WATERPROOFING REINFORCEMENT

fiberglass mesh for reinforcing waterproofing layers

Flexible alkali-resistant fiberglass mesh. Weight 60 g/m².

8 MOSAIC / TILE INSTALLATION

KP 300 flexy

Elastic polymer-modified tile adhesive - Type C2 TE S1

KP 500 elastic

High performance elastic polymer-modified
tile adhesive - Type C2 TE S1

KP 550 GEL ultra S1

High performance GEL-type deformable
cementitious adhesive - Type C2 TE S1

KP 600 ultra flex

Highly elastic polymer-modified tile adhesive
Type C2 TE S2

9 MOSAIC / TILE GROUTING

epoxy grout 2-12

2-component epoxy grout - Type RG